


# 压控MEMS振荡器(VCMO)

## MO3807/MO3808/MO3809

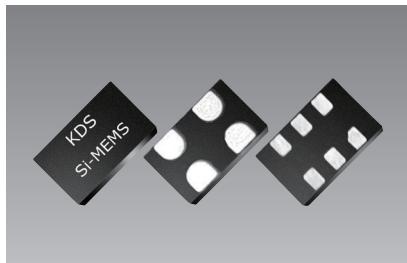

### ■ 优点

- 频率公差:  $\pm 25 \times 10^{-6}$
- 频率可变范围:  $\pm 25 \sim \pm 1600 \times 10^{-6}$
- 外形尺寸:  
2.7×2.4 mm (4端子, compatible with 2.5×2.0 footprint),  
3.2×2.5 mm (4端子), 5.0×3.2 mm (6端子), 7.0×5.0 mm (6端子)



无铅



RoHS对应

### ■ 用途

- Telecom clock synchronization, instrumentation
- Low bandwidth analog PLL, jitter cleaner, clock recovery, 音响
- 视频、宽带调制解调器、网络设备、3G/HD-SDI, FPGA

型号	频率范围 (MHz)	频率公差 ( $\times 10^{-6}$ )	电源电压 (V)	消耗电流 (mA Typ.)	尺寸 (mm)	输出
MO3807	30 standard frequencies	$\pm 25, \pm 50$	+1.71 to +1.89, +2.25 to +2.75	+29 to +36 (+10 $\mu$ A stby)	2.7×2.4×0.8, 3.2×2.5×0.8, 5.0×3.2×0.8, 7.0×5.0×1.0 (QFN)	LVC MOS
MO3808	1 to 80	$\pm 10, \pm 25, \pm 50$	+2.25 to +3.63			
MO3809	80 to 220					

### ■ 一般规格(MO3808)

项目	符号	Min.	Typ.	Max.	单位	条件
输出频率范围	f	1	-	80	MHz	
电源电压	Vdd	+1.71	+1.8	+1.89	V	Additional supply voltages between +2.5V and +3.3V can be supported.
		+2.25	+2.5	+2.75		
		+2.52	+2.8	+3.08		
		+2.97	+3.3	+3.63		
运行温度范围	T_use	-20	-	+70	°C	Extended Commercial
		-40	-	+85		Industrial
频率公差	F_stab	-10	-	+10	$\times 10^{-6}$	包含 +25°C 时的初始频率偏差 [4]、温度特性, 运行电源电压范围内的电源电压特性、负载特性。
		-25	-	+25		
		-50	-	+50		
长期老化 (10 年)	F_aging10	-5.0	-	+5.0	$\times 10^{-6}$	10 years, $T_A = +25^\circ\text{C}$
消耗电流	Idd	-	+31	+33	mA	No load condition, $f = 20 \text{ MHz}$ , $Vdd = +2.5\text{V}$ , $+2.8\text{V}$ or $+3.3\text{V}$
		-	+29	+31		No load condition, $f = 20 \text{ MHz}$ , $Vdd = +1.8\text{V}$
待机时电流	I_std	-	-	+70	$\mu\text{A}$	Vdd = +2.5V, +2.8V, +3.3V, ST = GND, Output is weakly pulled down
		-	-	+10		Vdd = +1.8V, ST = GND, Output is weakly pulled down
占空比	DC	45	-	55	%	All Vdds
0 电平电压	V <sub>OL</sub>	-	-	$Vdd \times 0.1$	V	$I_{OL} = +7.0 \text{ mA}$ ( $Vdd = +3.0\text{V}$ or $+3.3\text{V}$ ) $I_{OL} = +4.0 \text{ mA}$ ( $Vdd = +2.8\text{V}$ or $+2.5\text{V}$ ) $I_{OL} = +2.0 \text{ mA}$ ( $Vdd = +1.8\text{V}$ )
1 电平电压	V <sub>OH</sub>	$Vdd \times 0.9$	-	-	V	$I_{OH} = -7.0 \text{ mA}$ ( $Vdd = +3.0\text{V}$ or $+3.3\text{V}$ ) $I_{OH} = -4.0 \text{ mA}$ ( $Vdd = +2.8\text{V}$ or $+2.5\text{V}$ ) $I_{OH} = -2.0 \text{ mA}$ ( $Vdd = +1.8\text{V}$ )
上升时间、下降时间	Tr, Tf	-	1.5	2.0	ns	$Vdd = +1.8\text{V}$ , $+2.5\text{V}$ , $+2.8\text{V}$ or $+3.3\text{V}$ , 10% – 90% Vdd level
频率可变范围 [5,6]	PR	$\pm 25, \pm 50, \pm 100, \pm 150, \pm 200, \pm 400, \pm 800, \pm 1600,$			$\times 10^{-6}$	See the Absolute Pull Range and APR table of datasheet
1 电平控制电压	VC_U	+1.7	-	-	V	$Vdd = +1.8\text{V}$ , Voltage at which maximum deviation is guaranteed.
		+2.4	-	-		$Vdd = +2.5\text{V}$ , Voltage at which maximum deviation is guaranteed.
		+2.7	-	-		$Vdd = +2.8\text{V}$ , Voltage at which maximum deviation is guaranteed.
		+3.2	-	-		$Vdd = +3.3\text{V}$ , Voltage at which maximum deviation is guaranteed.
0 电平控制电压	VC_L	-	-	+0.1	V	Voltage at which minimum deviation is guaranteed.
输入阻抗	Z_in	100	-	-	kΩ	
输入容量	C_in	-	5.0	-	pF	
线性	Lin	-	0.1	1.0	%	
频率变化极性	-	Positive slope			-	
启动时间	T_start	-	-	10	ms	
输出使能时间 输出禁用时间	T_oe	-	-	180	ns	$f = 40\text{MHz}$ , all Vdds, For other freq., $T_{oe} = 100 \text{ ns} + 3$ clock periods
重起时间	T_resume	-	7.0	10	ms	
RMS 周期抖动	T_jitt	-	1.5	2.0	ps	$f = 20 \text{ MHz}$ , $Vdd = +2.5\text{V}$ , $+2.8\text{V}$ or $+3.3\text{V}$
		-	2.0	3.0		$f = 20 \text{ MHz}$ , $Vdd = +1.8\text{V}$
RMS 相位抖动 (随机)	T_phj	-	0.5	1.0	ps	$f = 20 \text{ MHz}$ , Integration bandwidth = 12 kHz to 20 MHz, All Vdds
包装单位		1000pcs./reel ( $\phi 180$ ) or 3000pcs./reel ( $\phi 180$ : 2724, 3225 package)				

[1]. 上述电气特性,除指定外,输出负载15pF,通过全部电源电压规定

[2]. Typical值是在 $T_A = +25^\circ\text{C}$ 、电源电压为额定最大值时规定的。

[3]. 除指定外,在Max/Min内的运行电源电压及运行温度保证

[4]. 初始频率偏差在 $Vin = Vdd/2$ 测量

[5]. 绝对频率可变范围(APR)根据运行电源电压范围及运行温度范围内的频率可变范围定义

[6]. APR = 频率可变范围(PR) - 频率公差(F\_stab) - 长期老化(F\_aging)