

1. Device Name

Crystal Resonator

2. Model Name

DSX211G

3. Nominal Frequency

55.466670

MHz

4. Device Summary

Mass

0.006

g max.

RoHS Compliant

MSL

=

1


AEC-Q200 Compliant

5. Electrical Characteristics

Item	Limits			unit	Conditions	Notes
	min.	Typ.	max.			
Mode of Vibration	AT-cut fundamental					
Load Capacitance	-	9	-	pF		
Drive Level	-	50	200	uW		
Series Resistance	-	-	30	Ω	TA= -40 ~ 105 °C	
	-	-	50	Ω	TA= 105 ~ 125 °C	
Frequency Tolerance	-20	-	20	ppm	TA= 25 °C	
Frequency Characteristics Over Temperature	-30	-	30	ppm	TA= -40 ~ 105 °C	
	-30	-	80	ppm	TA= 105 ~ 125 °C	
Aging(ref. +25 deg.C)	-5	-	5	ppm	1 year	
	-10	-	10	ppm	15 years	
Operating Temperature Range	-40	-	125	°C		
Storage Temperature Range	-40	-	125	°C		
Shunt Capacitance(C0)	0.48	0.60	0.72	pF		
Motional Capacitance(C1)	2.0	2.5	3.0	fF		
Motional Inductance(L1)	2.72	3.40	4.08	mH		
Insulation Resistance	500	-	-	MΩ		

TITLE DSX211G TYPE SPECIFICATION		REMARK P2024-2421	
DATE 2024/9/6	SPEC. No.	REV.	PAGE 1 / 2

6. DIMENSIONS AND MARKING

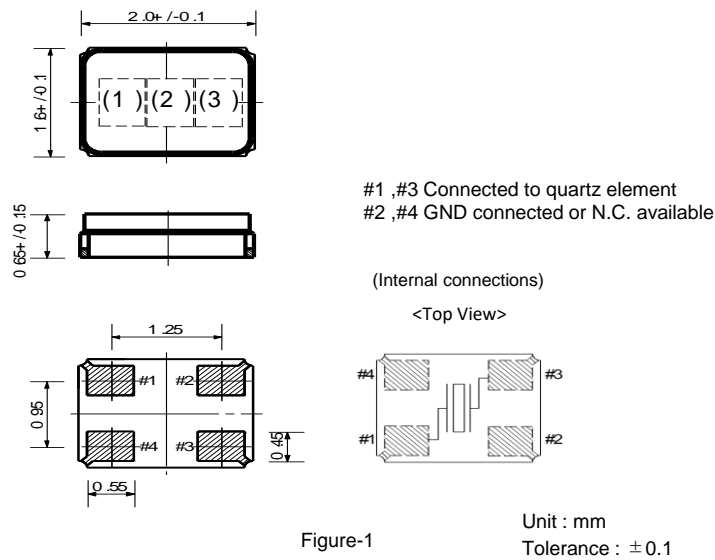

Logo(1) and Nominal Frequency (2) should be printed as follows by producing district

Made in Indonesia ⇒ Logo : D , Frequency: 55 : Under Bar with D

* Depending on the detailed application, some production areas may not be available. Please note.

Nominal Frequency (2) = Mark two digits from upper decimal point
(ex. 55.466670 MHz ----> 55)

Manufacturing lot No.(3)

Year : The last digit of the year
week : We gave the sequence of week numbers 01(first week) for production date.
there are starting from 1st of Jan. However, add '0' figure to the first week during the nine weeks.
The week means are from Sunday to Saturday.
(ex. 2024/9/6 ----> 436)

TITLE DSX211G TYPE SPECIFICATION	REMARK P2024-2421		
DATE 2024/9/6	SPEC. No.	REV.	PAGE 2 / 2