


# SMD Voltage Controlled Crystal Oscillators

## DSV321SV

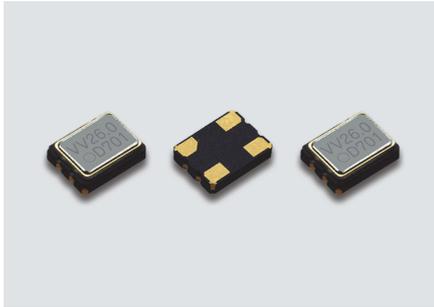

Actual size

### ■ Features

- 3225 size, 1.1mm height
- The product is an analog VCXO which ensures good variable frequency and a linear changing frequency.
- Low current consumption
- CMOS Level Output

### ■ Applications

- DVD, Digital TV, STB, backbone transmission equipment



### ■ Standard Specification


Item	Type	Legend	DSV321SV
Output Frequency Range		f <sub>o</sub>	6.75 to 125MHz
Supply Voltage		V <sub>cc</sub>	+3.3V±0.33V
Frequency Control Voltage		V <sub>cont</sub>	+1.65V±1.65V
Storage Temperature Range		T <sub>stg</sub>	-40 to +85°C
Operating Temperature Range		T <sub>use</sub>	-10 to +70°C / -30 to +85°C
Frequency Tolerance (Includes frequency tolerance at room temperature.)		f <sub>tol</sub>	±40×10 <sup>-6</sup> max.
Frequency Adjustment Range		f <sub>cont</sub>	±100×10 <sup>-6</sup> min. [Positive Slope]
Current Consumption		I <sub>cc</sub>	7mA max. (6.75MHz≤f <sub>o</sub> ≤36MHz) 17mA max. (36MHz<f <sub>o</sub> ≤70MHz) 27mA max. (70MHz<f <sub>o</sub> ≤125MHz) [No Load]
Load Condition		L <sub>cmos</sub>	15pF
Symmetry		SYM	40 to 60% [50% V <sub>cc</sub> Level]
0 Level Output Voltage		V <sub>OL</sub>	V <sub>cc</sub> ×0.1 max.
1 Level Output Voltage		V <sub>OH</sub>	V <sub>cc</sub> ×0.9 min.
Rise and Fall Time		t <sub>r</sub> , t <sub>f</sub>	5ns max. (6.75MHz≤f <sub>o</sub> ≤90MHz) 3ns max. (90MHz<f <sub>o</sub> ≤125MHz) [10 to 90% V <sub>cc</sub> Level]
Period Jitter (1)		t <sub>RMS</sub>	2.4ps typ. (σ)
		t <sub>p-p</sub>	22ps typ. (Peak to peak)
Total Jitter (1)		t <sub>TL</sub>	33ps typ. [t <sub>DJ</sub> + n×t <sub>RJ</sub> n=14.1(BER=1×10 <sup>-12</sup> )(2)]
Phase Jitter		t <sub>pj</sub>	1ps max. (10MHz≤f <sub>o</sub> <40MHz, f <sub>o</sub> offset : 12kHz to 5MHz, f <sub>o</sub> ≥40MHz, f <sub>o</sub> offset : 12kHz to 20MHz)
Packing Unit (3)		-	2000pcs./reel (φ180)

- (1) Measured WAVECREST DTS-2075  
 (2) t<sub>DJ</sub> : Deterministic jitter t<sub>RJ</sub> : Random jitter  
 (3) Moisture prevention packing is unnecessary.  
 Moisture Sensitivity Level : Level 1 (IPC/JEDEC J-STD-033)

Consult our sales representative for other specifications.

[mm]

### ■ Dimensions

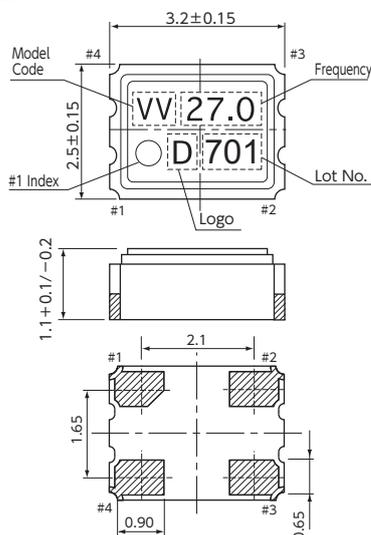

Pin Connections	
Pin No.	Connection
#1	V <sub>cont</sub>
#2	GND
#3	Output
#4	V <sub>cc</sub>

### ■ Recommended Land Pattern

<Top View>

