

1. Device Name TCXO
2. Model Name DSB1612SDN
3. Nominal Frequency 52 MHz
4. Mass 0.008 g max.

5. Absolute Maximum Ratings

	Item	Symbol	Rating	unit
1	Supply Voltage	V _{CC}	-0.3 ~ +4.6	V
2	Storage Temperature Range	T _{-STG}	-40 ~ +125	°C

6. Recommended Operating Conditions

	Item	Symbol	min.	typ.	max.	unit
1	Supply Voltage	V _{CC}	+3.135	+3.3	+3.465	V
2	Load Impedance (resistance part)	L _{OAD_R}	9	10	11	kΩ
	(parallel capacitance)	L _{OAD_C}	9	10	11	pF
3	Operating Temperature Range	T _{use}	-40	-	+85	°C

7. Electrical Characteristics

(T_A= -40 ~ +85 °C, L_{OAD_R}/C= 10 kΩ// 10 pF, V_{CC}= +3.3 V unless otherwise noted)

	Item	Condition	Limits			unit	Notes
			min.	typ.	max.		
1	Current Consumption		-	-	+2	mA	
2	Output Level		0.8	-	-	V _{P-P}	1
3	Symmetry	GND level (DC cut)	40/60	-	60/40	%	
4	Frequency Stability						
	1.Tolerance	After 2 times reflow Ref. to nominal frequency	-1.5	-	1.5	ppm	2,3
	2.vs Temperature	T _A =-40~+85°C Ref. to Frequency(T _A =+25°C)	-0.5	-	0.5	ppm	
	3.vs Supply Voltage	V _{CC} = +3.3 V ±5%	-0.2	-	0.2	ppm	
	4.vs Load Variation	LOAD_R/C=(10kΩ//10pF)±10%	-0.2	-	0.2	ppm	
	5.vs Aging	T _A =Room ambient	-1	-	1	ppm/year	
5	Start Up Time	@90% of final V _{OUT} level	-	-	2	ms	
6	SSB Phase Noise	Relative to f ₀ level offset 1k Hz	-	-	-125	dBc/Hz	

Notes

- 1.Clipped sine wave (DC-coupled)
- 2.T_A=+25°C
3. Please leave after reflow in 2h or more at room ambient.


TITLE	REMARK		
DSB1612SDN TYPE SPECIFICATION	P2025-2159		
DATE	SPEC. No.	REV.	PAGE
2025/8/28	7EG05200A0K	-	1 / 2

DAISHINKU CORP.

DM-Z0002:Style-010

8. Outline, Pin Connections

Outline

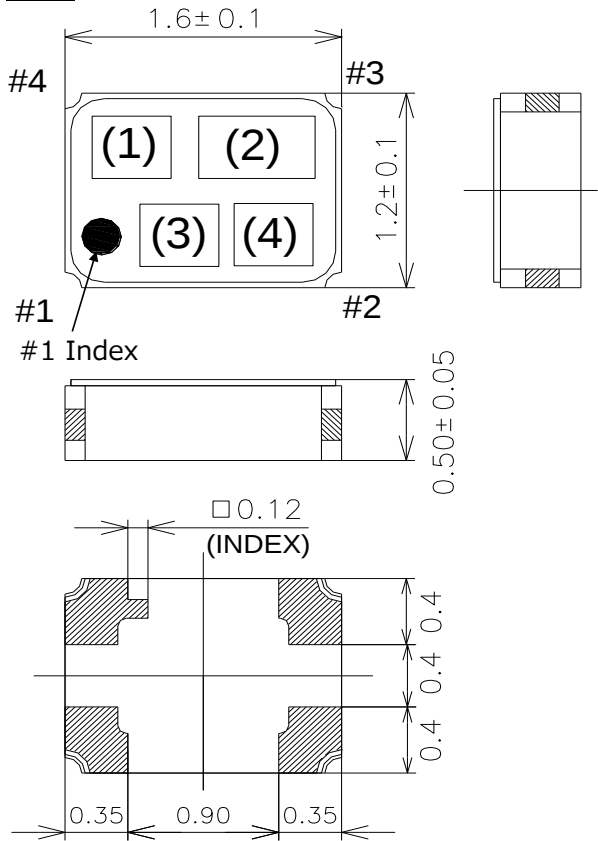

Pin Connections

Pin No.	Connection
#1	GND
#2	GND
#3	Output
#4	V _{CC}


Marking

- (1) Model code B
(2) Frequency 52.0 (MHz, 3 digits)
(3) Logo D
(4) Date code Year (1 digit) + Week (2 digits)
e.g. 2025/1/1 → 501

unit: mm
Dimensional Tolerance: ± 0.1
(Unless otherwise noted)

- Bottom View -

9. Measurement Circuit

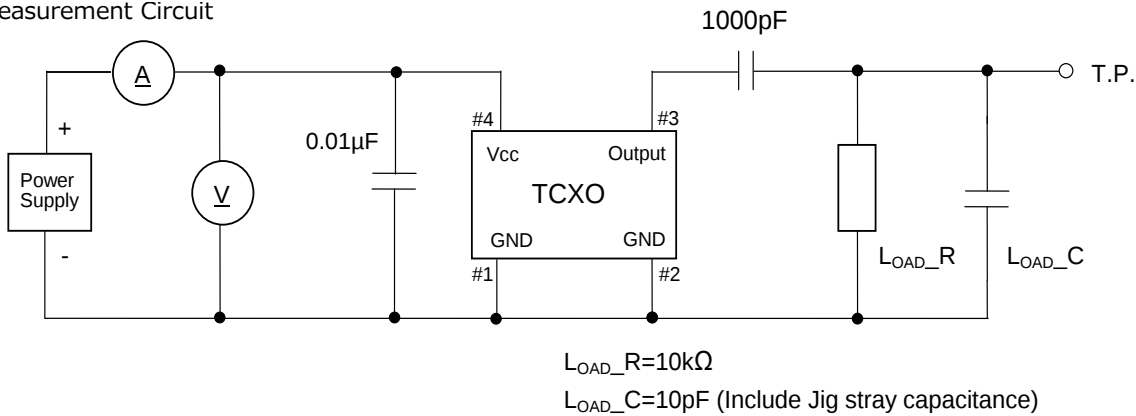

TITLE	REMARK	REV.	PAGE
DSB1612SDN TYPE SPECIFICATION	P2025-2159		2 / 2
DATE	SPEC. No.		
2025/8/28	7EG05200A0K		