

1. Device Name

Crystal Resonator
2. Model Name

DSX321G
3. Nominal Frequency

16.000

MHz
4. Device Summary

Mass

0.018

g max.

MSL

=

1

RoHS Compliant


AEC-Q200 Compliant

5. Electrical Characteristics

Item	Limits			unit	Conditions	Notes
	min.	Typ.	max.			
Mode of Vibration	AT-cut fundamental					
Load Capacitance	-	8	-	pF		
Drive Level	-	100	200	uW		
Series Resistance	-	-	60	Ω		
Frequency Tolerance	-20	-	20	ppm	T _A = 25 °C	
Frequency Characteristics Over Temperature	-50	-	50	ppm	T _A = -40 ~ 125 °C	
Aging(ref. +25 deg.C)	-3	-	3	ppm	1 year	
Operating Temperature Range	-40	-	125	°C		
Storage Temperature Range	-40	-	150	°C		
Shunt Capacitance(C0)	-	-	2	pF		
Insulation Resistance	500	-	-	MΩ		

TITLE DSX321G TYPE SPECIFICATION		REMARK P2025-2142		
DATE 2025/8/28	SPEC. No. 7AD01600A7U		REV.	PAGE 1 / 2

6. DIMENSIONS AND MARKING

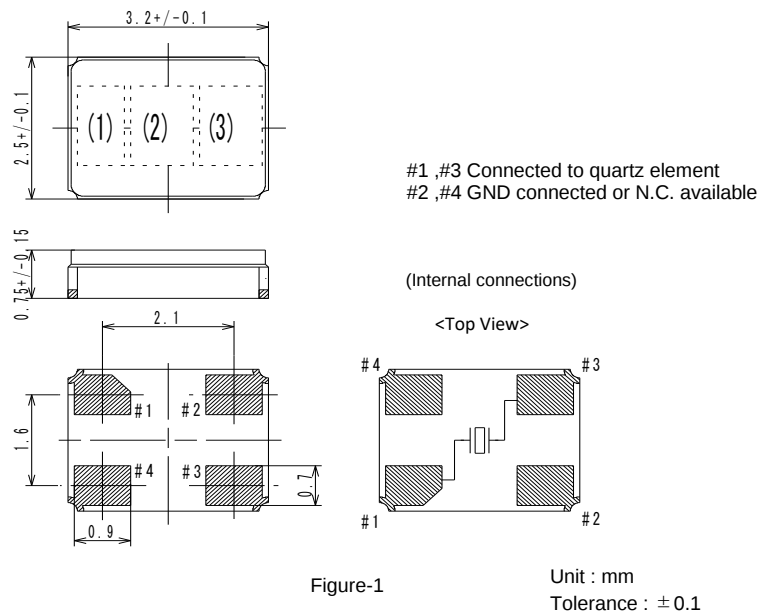

Logo(1) and Nominal Frequency (2) should be printed as follows by producing district

Made in Indonesia $\Rightarrow$ Logo : $\underline{\text{D}}$, Frequency: 16 : Under Bar with D

Made in THAILAND $\Rightarrow$ Logo : $\overline{\text{D}}$, Frequency: 16 : Top Bar with D

* Depending on the detailed application, some production areas may not be available. Please note.

Nominal Frequency (2) = Mark two digits from upper decimal point
(ex. 16.000 MHz ----> 16)

Manufacturing lot No.(3)
Year : The last digit of the year
week : We gave the sequence of week numbers 01(first week) for production date.
there are starting from 1st of Jan. However, add '0' figure to the first week during the nine weeks.
The week means are from Sunday to Saturday.
(ex. 2025/8/28 ---> 535)

TITLE DSX321G TYPE SPECIFICATION	REMARK P2025-2142		
DATE 2025/8/28	SPEC. No. 7AD01600A7U	REV.	PAGE 2 / 2