


# SMD Real Time Clock Oscillator

## DD3225TR

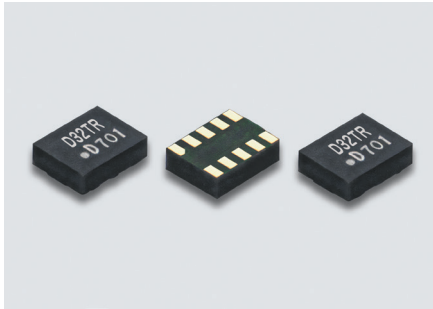

Actual size

### Features

- Precision :  $\pm 11.5 \times 10^{-6}$  (30 seconds per month),  $\pm 23.0 \times 10^{-6}$  (60 seconds per month)
- Low current consumption
- Low voltage operation : +1.5 to +5.5V, +1.3 to +5.5V (Clock Timing Operating)
- I<sup>2</sup>C-BUS serial interface : 400kHz fast-mode compatible
- Clock function : hour·minute·second, Calendar function with auto leap year adjustment : year·month·day·day of week
- Alarm interrupt function : day·day of week
- Fixed-cycle timer interrupt function : 244 $\mu$ s to 255min
- Time update interrupt function : minute·second
- Clock output function : 32.768kHz, 1024Hz, 32Hz, 1Hz
- CMOS Level Output
- \* "I<sup>2</sup>C-BUS" is a trademark of NXP semiconductors.



### Applications

- Calendar, Timer, Alarm, Standard for watches
- Remote control with calendar, Data logger, Wireless sensor, Amusement device

### Standard Specification


Item	Legend	Spec.				Condition
		min.	typ.	max.	unit	
Output Frequency	f <sub>o</sub>	—	32.768	—	kHz	
Supply Voltage Range	V <sub>cc</sub>	+1.3	—	+5.5	V	(Clock Timing Operating)
	V <sub>int</sub>	+1.5	—	+5.5		(Interface Operation) I <sup>2</sup> C-BUS
Frequency Tolerance	f <sub>tol</sub>	- 11.5	—	+11.5	$\times 10^{-6}$	T <sub>a</sub> = 25°C, V <sub>cc</sub> = +3.0V (30 seconds per month)
		- 23	—	+23		T <sub>a</sub> = 25°C, V <sub>cc</sub> = +3.0V (60 seconds per month)
Operating temperature range	T <sub>a</sub>	- 40	—	+85	°C	
Current Consumption	I <sub>cc1</sub>	—	0.29	2.10	$\mu$ A	V <sub>cc</sub> = +3.0V SCL = SDA = INTN = V <sub>cc</sub> , OE = GND (Output Off)
		—	0.41	2.90		V <sub>cc</sub> = +5.0V
	I <sub>cc2</sub>	—	0.89	2.80	$\mu$ A	V <sub>cc</sub> = +3.0V SCL = SDA = INTN = OE = V <sub>cc</sub> (Output On), No Load
		—	1.29	4.00		V <sub>cc</sub> = +5.0V
Load Condition	L <sub>CMOS</sub>	—	—	15	pF	
Symmetry	SYM	40	—	60	%	50%V <sub>cc</sub>
1 level Output Voltage	V <sub>OH</sub>	0.8xV <sub>cc</sub>	—	—	V	I <sub>OH</sub> = - 1mA
0 level Output Voltage	V <sub>OL</sub>	—	—	0.2xV <sub>cc</sub>	V	I <sub>OL</sub> = 1mA
Rise / Fall Time	Tr/Tf	—	—	100	ns	20 to 80%V <sub>cc</sub>
OE Pin 1 level Input Voltage	V <sub>IH</sub>	0.8xV <sub>cc</sub>	—	V <sub>cc</sub>	V	
OE Pin 0 level Input Voltage	V <sub>IL</sub>	0	—	0.2xV <sub>cc</sub>	V	
Start Up Time	T <sub>start</sub>	—	—	1	s	T <sub>a</sub> = +25°C, V <sub>cc</sub> = +1.3V
Packing Unit (1)						2000pcs./reel ( $\phi$ 180)

(1) Moisture prevention packing  
Moisture sensitivity level : Level 2 (IPC/JEDEC J-STD-033)

Consult our sales representative for other specifications.

[mm]

### Dimensions

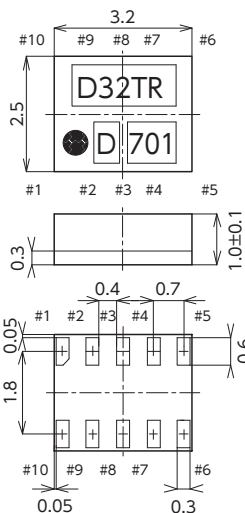


Function	
#2 Input	#4 Output Condition
H	Oscillation out
L	High Z

Marking	
(1) Type	D32TR
(2) Logo	D
(3) Date code	Year(1digit) + Week(2digits) e.g.2022/1/1 → 201

### Recommended Land Pattern

<Top View>

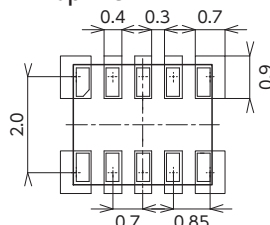

### Pin Function

No.	Name	I/O	Function
#1	V <sub>cc</sub>	-	Supply Voltage
#2	OE	I	Output control enable input (L:High impedance,H:Clock output)
#3	N.C.	-	Do not connect
#4	Output	O	Clock output connection
#5	SCL	I	I <sup>2</sup> C-BUS serial interface clock input connection.
#6	EVENT	I	Trigger input for Time stamp request. Internal pull-up resistor can be selected. Input polarity can be selected.
#7	SDA	I/O	I <sup>2</sup> C-BUS serial interface data input/output connection.
#8	N.C.	-	
#9	GND	-	Ground connection.
#10	INTN	O	1Hz signal, alarm interrupt signal, fixed-cycle timer interrupt signal, and time update interrupt signal, Nch open-drain output.